

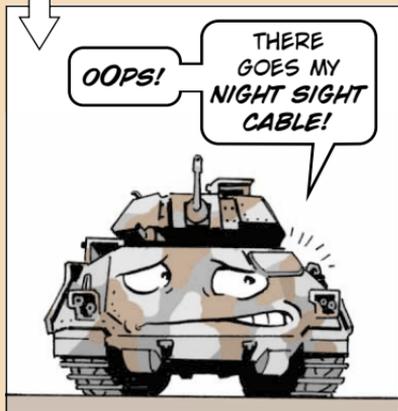


Stop Crushing Cable

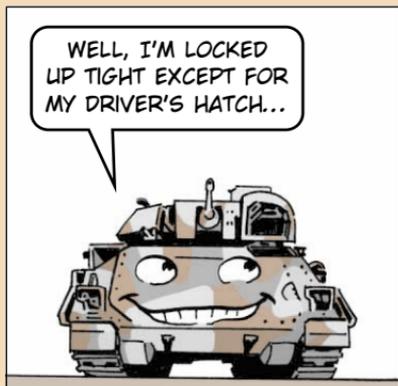


Drivers, the job's not finished when you remove and lock up your Bradley's IR night sight after every operation.

You still need to hook the 1W17P10 night sight cable, NSN 5995-01-271-0367, to the dummy mount on the hatch.

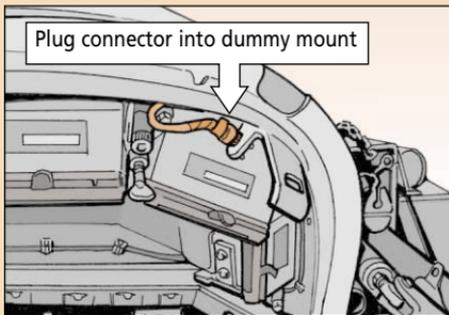

Otherwise, the cable is left dangling. When the hatch is closed, the cable connector gets crushed.

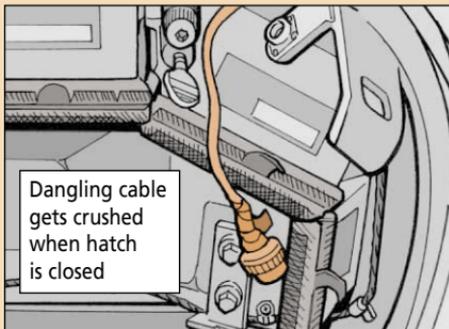

If you **do** forget and the cable connector is ruined, make sure you get DS to replace it with NSN 5935-01-132-1570. That'll save your unit more than \$200 when compared to the cost of a new cable.