


## Clean Back of Radiator Every Six Months

This is critical if you're operating in a sandy environment. Oil and sand collect on the backside of the radiator. If it gets too dirty, the radiator can't cool the generator and it overheats. That can kill the generator.

To clean the back of the radiator, you'll need to get your mechanic to remove the fan guard, which is held in place by several screws. Spray low-pressure water through the front of the radiator to loosen up the gunk. Then use something soft and flexible like a playing card to scrape off the gunk. Don't use anything metallic that could damage the radiator coils.

Run low-pressure water through front of radiator to knock loose crud

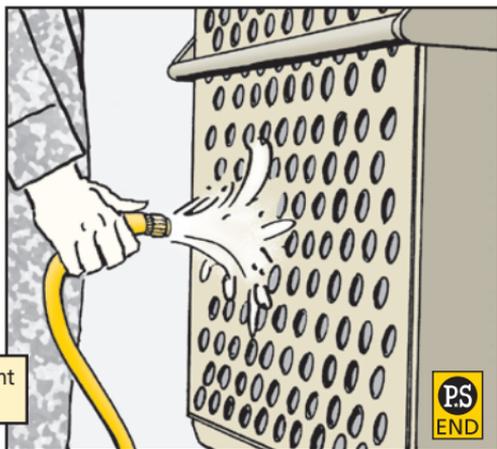

### M240-Series Machine Gun...

# LOOK FOR LOOSE OP ROD PIN



IF THE M240-SERIES MACHINE GUN OP ROD GAS PISTON PIN LOOSENS TOO MUCH, YOUR GUN WILL STOP FIRING.

OPERATORS SHOULD IMMEDIATELY CHECK ALL THEIR M240 OP RODS FOR LOOSE PINS. JUST FEEL THE GAS PISTON TO SEE IF IT'S LOOSE. IT'S OK FOR IT TO MOVE A LITTLE.

ALSO CHECK FOR ANY DAMAGED OR MISSING OP ROD PARTS.

THERE IS NO FIX FOR A LOOSE PISTON PIN OTHER THAN TO REPLACE THE OP ROD.

THIS CHECK WILL BE ADDED TO THE PMCS IN THE NEXT UPDATE TO TM 9-1005-313-23&P.

