


Check the Rating on Pack Pulling



Pulling and installing the powerpack on your armored vehicle launched bridge (AVLB) should be rated CG—Crewman Guidance suggested.

That's because the powerpack is big, bulky, and hard to control. Mechanics need all the help they can get to keep the pack from hitting things it's not supposed to—like the 5-gal water can bracket, for instance.

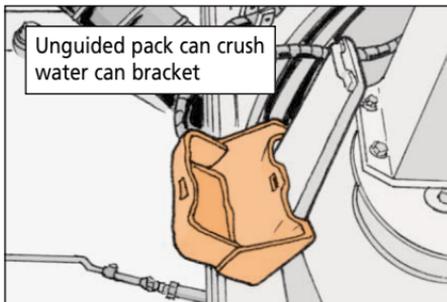

The bracket gets crushed, of course. But it's the unseen damage that's the real cause for concern. The edge of the water can bracket can cut or chafe some of the fuel lines on the powerpack.

Cut or weakened fuel lines can leak and cause a fire. So, crewmen, lend your mechanics a hand when it's time to pull or install the powerpack in your AVLB. Extra hands and eyes will prevent any damage.