


CHANGE ELEMENT ONCE EVERY 2 YEARS

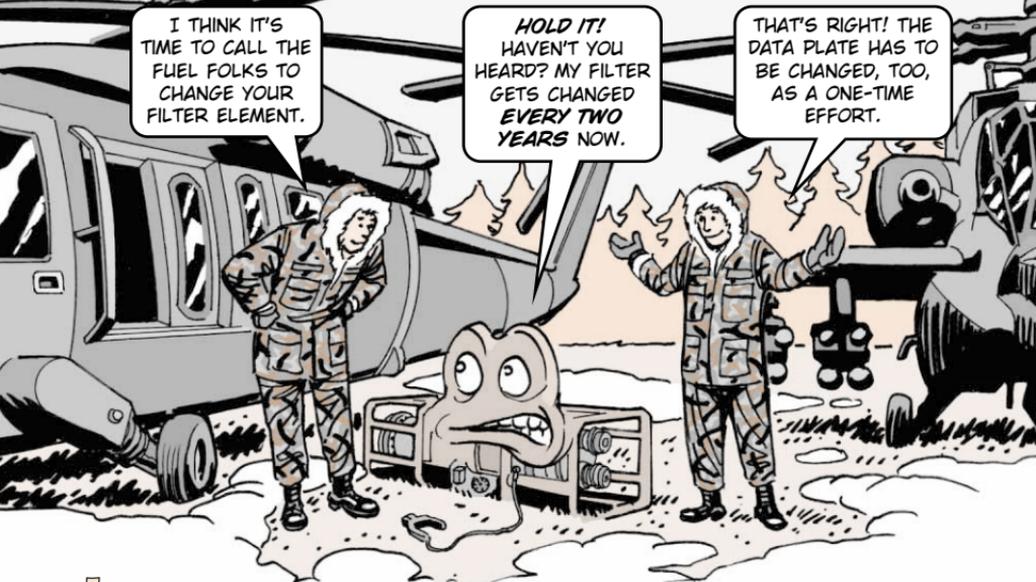

Fuel handlers, the once-a-year change-out requirement of the advanced aviation forward area refueling system's (AAFARS) fluid filter separator element is too often.

So instead of changing the AAFARS filter separator element every year, the TACOM headshed says to change it every 2 years. That's because every 2 years makes better use of the separator element without increasing its failure rate. Your cost to replace the element is reduced, too.

If you haven't done so, use the metal stamp set in your Common No. 1 tool kit, NSN 4910-00-754-0654, to change the AAFARS data plate info from 1 year to 2. Also, if there's space, stamp in the month and year the separator is changed for purposes of accountability. The marking of the data plate is a one-time occurrence, not every 2 years.

Note these changes until TM 10-4330-237-13&P is changed.

BETA SYSTEMS RDSVILLE, N.C. FILTER SEPARATOR ASSEMBLY		Stamped data plate
MODEL NO. _____	SERIAL NO. _____	
DESIGN FLOW RATE _____	GPM AT _____	PSI MAX. W.H. _____
FIRST STAGE COALESCER ELEMENTS QTY: _____ PART NO: _____	SECOND STAGE PERMANENT SEPARATORS QTY: _____ PART NO: _____	
API GI _____	THIRD STAGE QTY: _____ PART NO. CDF: _____	
CONTRACT NUMBER _____	DATE OF MANUFACTURE _____	
CHANGE ELEMENTS AT _____ PS OR EVERY _____ YEARS, WHICHEVER C	DATE ELEMENTS INSTALLED _____	Stamp in month and date when filter is changed here
METER TOTALIZER READING _____		