

# CHECK THE BATTERIES

YOU JUST AREN'T ACCURATE ANYMORE...

...WHAT'S HAPPENED TO YOU?

I HAVEN'T HAD MY BATTERIES CHANGED IN FOUR YEARS!

MY MEMORY IS TOTALLY... UH... UHM... ~~WARGH!~~ I FORGOT WHAT I WAS SAYING!


Some engineer units are finding after they deploy that their automated integrated surveying instruments (AISI) aren't working right because the internal batteries need to be replaced.

Don't let that happen to you! Survey the batteries on all your AISIs right now to see if their internal batteries have been replaced in the last three years. If they haven't been, the batteries need to be replaced.

There are two ways to check:


- Look at the Trimble Battery replacement due date sticker just below the distance meter head.

Look at replacement due date sticker...

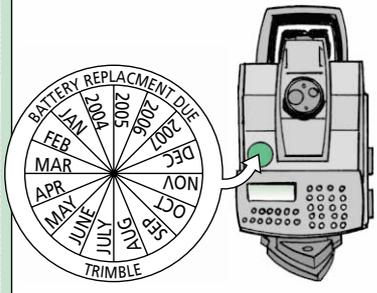

- Turn the power on and look for INFO 26 in the display. That means the batteries need to be replaced as soon as possible. If you continue to operate the AISI in an INFO 26 condition or with expired batteries you risk total loss of the AISI's memory or AISI failure.

...or check for INFO 26 in display



You can't replace the batteries yourself. An authorized service center must do it.

To get instructions and approval for free AISI battery replacement, contact CECOM's Danny Carter at DSN 987-5472/(732) 427-5472 or email

**danny.carter@mail1.monmouth.army.mil**

or contact Hilda Thomas at DSN 992-9982/(732) 532-9982 or email

**hilda.thomas@mail1.monmouth.army.mil**

They will need the serial numbers of your AISIs.

MICLIC...

# Upgrading MICLICs

PLEASE, PLEASE, PLEASE HELP ME BECOME A MOD 3!

ALL THE OTHER MICLICs HERE ARE MOD 3s AND THEY'RE MAKING FUN OF ME!

LEMME GO GET TB 9-2330-323-30 AND WE'LL GET STARTED.



Dear Half-Mast,  
We have several trailer-mounted MICLICs that are MOD 1. How do we convert them to MOD 3?

CW2 R.W.

Dear Chief R.W.,

The M200A1 trailer must be upgraded by your direct support like it says in TB 9-2330-323-30 for the MICLIC to be MOD 3. If you need a copy of the TB, contact TACOM-Rock Island's Cameron Reed at DSN 793-1521/(309) 782-1521 or email:

**reedc@ria.army.mil**

*Half-Mast*