



CHANGE PRIMING PUMP FILTER

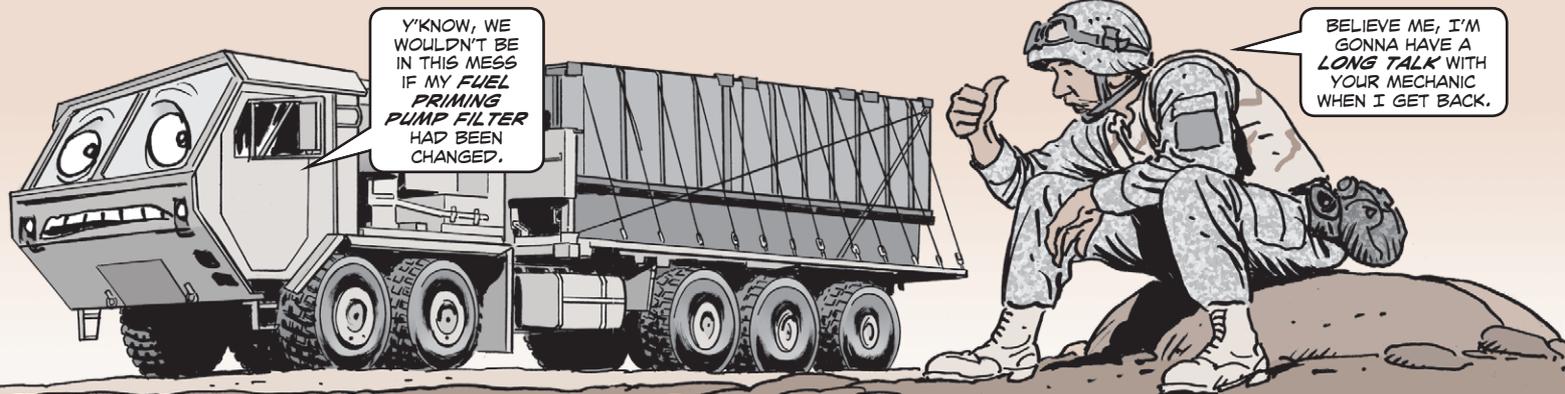

PLS mechanics, don't be chumps and forget about the priming pump!

The electric priming pump, NSN 2910-01-408-1530, pressurizes the vehicle's fuel system. Because the pump sits out of sight behind the fuel/water separator, it's often overlooked when it comes to maintenance.

Priming pump is hidden behind fuel/water separator



Dirty fuel clogs the filter and the engine runs rough or not at all. Even worse, a clogged filter can make the pump seize and burn up.

To change the filter, NSN 2910-01-054-6990, annually or every 6,000 miles, whichever comes first.



NEED SMALL ARMS HELP? NEED DEPOT REPAIR?



If your unit is preparing to deploy, the Army has an assistance team that will help armorers get their pistols, rifles, and machine guns ready for battle.

The Small Arms Readiness and Evaluation Team (SARET) will pay your unit a visit and do small arms inspections and repairs on site. The team is composed of small arms technicians from TACOM-Rock Island Arsenal and Anniston Army Depot. SARET prefers to do brigade-size inspections over a two-week period. Units pay only for parts used in repair.

To schedule a SARET visit, contact TACOM's Tom Jefferson at DSN 793-3394/(309) 782-3394 or email: jefferson@ria.army.mil or contact Kevin Moore at DSN 793-2359/(309) 782-2359 or email: kevin.o.moore@us.army.mil

Depot Repair

Sometimes weapons can't be repaired locally, but must be sent off to depot—usually for things like a cracked receiver or loose rivets or protective finish missing from more than 1/3 of the receiver.

Unrepairable weapons should be sent off to depot ASAP so they can be fixed and given to units deploying or transforming.

Units should not try to do depot repairs themselves, particularly refinishing weapons. That is a complicated task that Anniston will do at no cost to units.

Weapons needing depot repair should be turned in as "Not Repairable This Station". Units should requisition replacement small arms with the correct RESET project code in card columns 57-59. Use a 26-type requirement code in card columns 55-56 like it says in Table C-23 in AR 725-50.