



PLUGGED GLADHAND CAN FOIL BRAKE

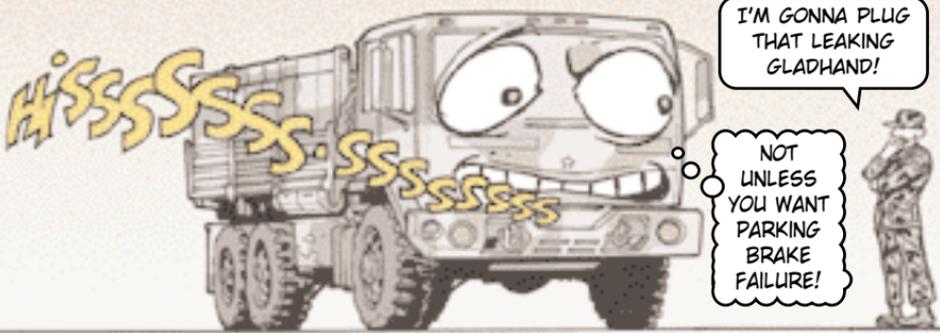

Resist the quick-fix urge to plug a leaking front air system gladhand. If you do, the FMTV's parking brake won't be able to lock the spring brakes on the rear wheels.

The gladhands must vent as designed when the truck is placed in SYSTEM PARK so that it won't roll away. Any plug used to seal off a gladhand takes away the venting feature.

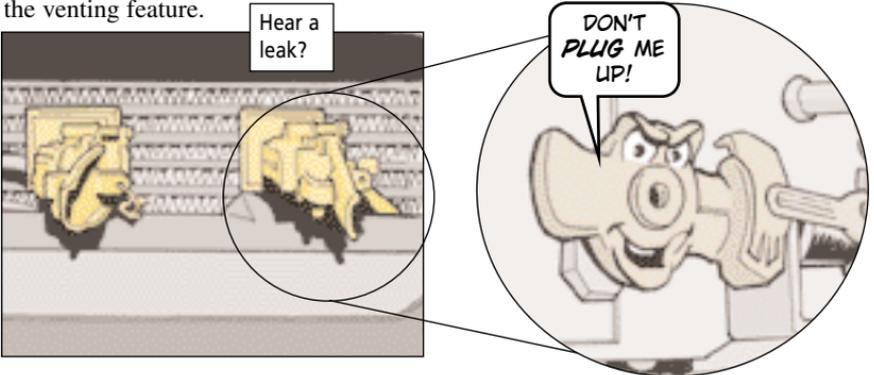

And if the spring brake doesn't work right, the truck will roll when put in SYSTEM PARK. That truck you thought would stay where you put it may end up real close to you—maybe too close.

So, when you have a front gladhand leak, don't plug it. Get a mechanic to fix it. Most times the problem can be fixed by servicing or replacing the one-way check valve inside the front gladhands.

