


File Latch to Fit



TACOM is authorizing armorers to file or stone the cover latch to fit.

Step 3 in WP 0027 00-3 in TM 9-1005-213-23&P is being changed to read:

"Install cover latch (4) and cover latch lever (5) in subassembly cover (2). Be sure cover latch is under lip on flat spring (3). Cover latch is a File/Stone To Fit part. Remove ONLY enough material to allow cover latch to maintain the top cover clearance (0.020 inch max) check as indicated on WP 0020 00-7."

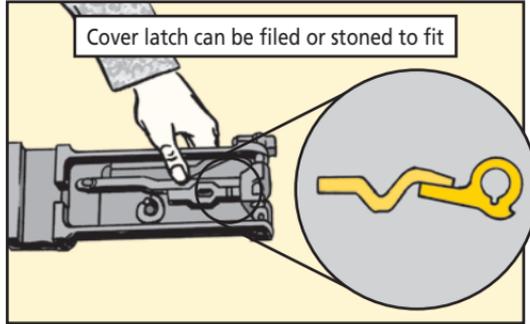

Small Arms...

GAGING TB ONLY ON INTERNET



Dear Editor,

In your article on small arms gages on Page 26 in PS 698 (Jan 11), you said TB 43-180, *Calibration and Repair Requirements for the Maintenance of Army Materiel*, is on EM 0022.

Unfortunately, that EM has been rescinded. But you can still find the TB on the ETM site:

<https://www.logsa.army.mil/etms/online.cfm>

The TB is updated monthly.

MSG Andrew Wilde
State TMDE Coordinator
MOARNG

Editor's note: Thanks for the update, Master Sergeant.