

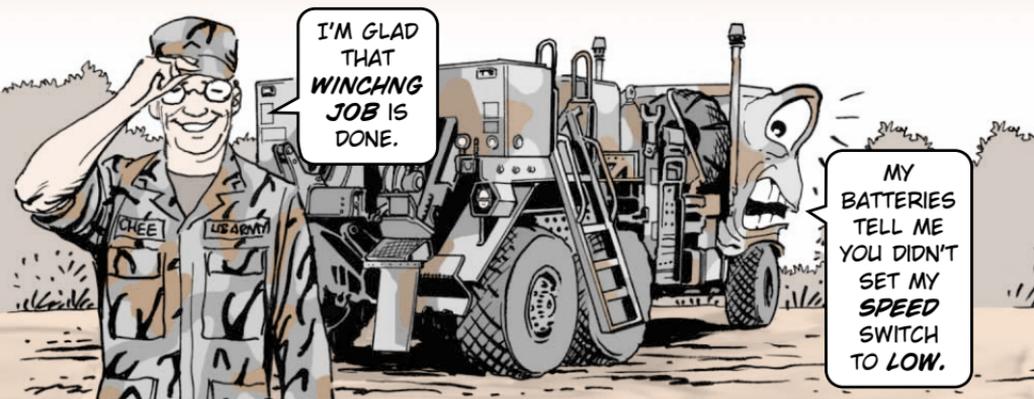


Move Switches to Save Batteries

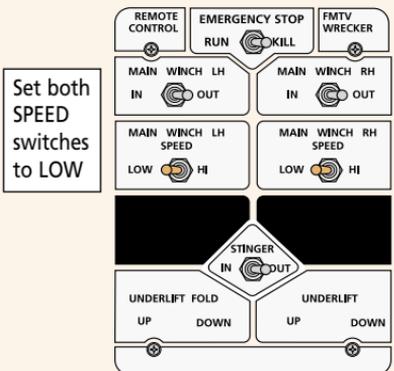

When you've finished winching operations with your M1089 wrecker, make sure the batteries don't run down before your next mission.

Both main winch speed switches on the remote control panel must be set to LOW at shutdown. And the STATION

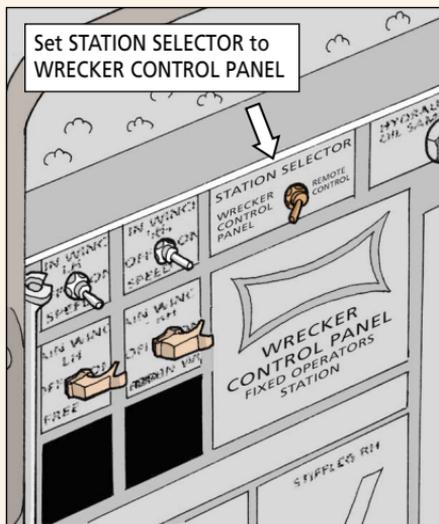

Set both SPEED switches to LOW

If you leave the speed switches set to HI and the selector switch set to REMOTE CONTROL, battery power continues to go to the remote control panel. That can kill your vehicle's batteries.

Until the TM is updated, note this information and save some battery money and slaving time.

SELECTOR switch on the fixed control panel must also be set to WRECKER CONTROL PANEL. TM 9-2320-366-10-2 fails to mention either setting.