



MRAP GUNNER'S HATCH LATCH PIN



The gunner's sliding hatch inner lock assembly latch pin on the MRAP MaxxProPlus is falling out of place because of a faulty C-clip. That means the hatch can slam down without warning on the gunner! Refer to WP 4-14.4 of TM 9-2355-318-23-3 on how to remove the C-clip, Item 9, and the latch pin, Item 10, and how to replace them with retrofit latch and cotter pins. See TACOM GPA 09-020 for more info:

https://tulsa.tacom.army.mil/safety/gpm/tacom_wn/gpm09-020.html

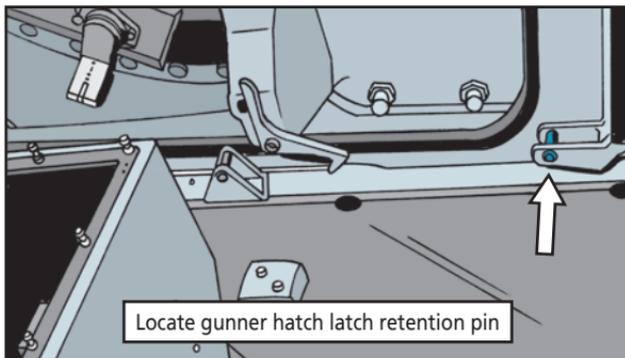

BY THE WAY, YOU WILL NEED YOUR CAC TO ACCESS THIS WEBSITE.

