


Which BFA to Use



WE'RE SUPPOSED TO BE TRAINING WITH **BLANKS** TODAY...

...BUT WITH SO MANY DIFFERENT TYPES OF M240s, I DON'T KNOW WHICH BFA TO USE WITH EACH ONE OF YOU!

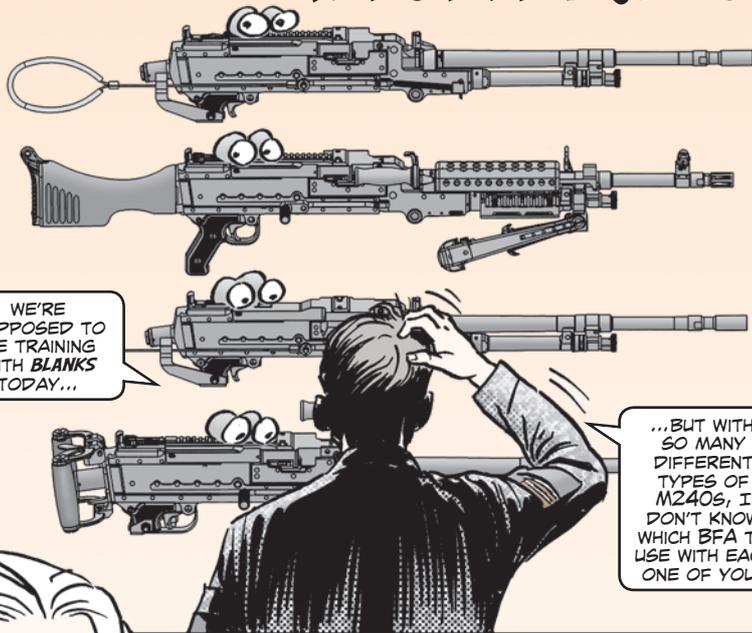


THERE ARE **TWO DIFFERENT** BFAs (BLANK FIRING ATTACHMENTS) THAT CAN BE USED ON THE VARIOUS M240 MACHINE GUNS, BUT THEY **AREN'T** INTERCHANGEABLE.

UNITS ARE **CONFUSED** WHICH BFA GOES WITH WHICH M240 MODEL, SO HERE'S THE SCOOP...


M21 BFA—The M21 doesn't have an overall NSN, but instead has three separate components: chamber and discriminator assembly, NSN 1005-01-142-2841; weapon spare parts ordnance bag, NSN 8105-01-147-9841; and M1/M1A1 tank firing attachment adapter, NSN 1005-01-218-0693.

These items cannot be ordered with one NSN—they must be ordered individually.

The chamber and discriminator assembly and the ordnance bag should be used on the M240, M240C and M240E. But the M1/M1A1 firing attachment adapter should be used only on the M240 when it's being fired from an M1/M1A1 tank.

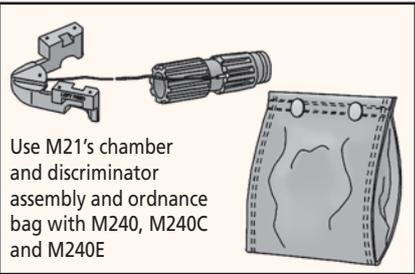

Use M21's chamber and discriminator assembly and ordnance bag with M240, M240C and M240E

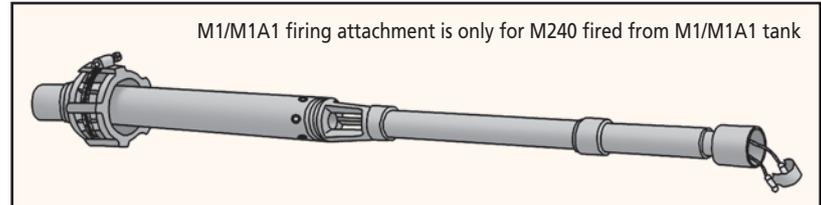


M1/M1A1 firing attachment is only for M240 fired from M1/M1A1 tank

M24 BFA—The M24, NSN 1005-01-480-0289, is the only authorized BFA for the M240B, M240D, M240H, M240L, and M240N. The M24 does not need a discriminator—it's a stand-alone item.

The M24 BFA has two repair parts: the shaft, NSN 5340-01-481-8127, and pull ring, NSN 5325-01-480-6849.


If you're ever in doubt, check TM 9-1005-313-10 and the -23&P for the correct NSNs and configurations.

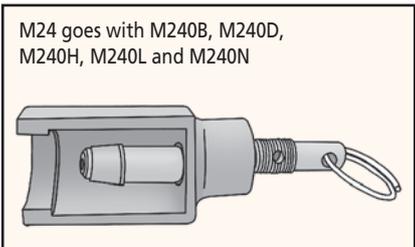

M24 goes with M240B, M240D, M240H, M240L and M240N

XM7 Spider Area Denial System...

BATTERIES TO POWER YOUR SPIDER!

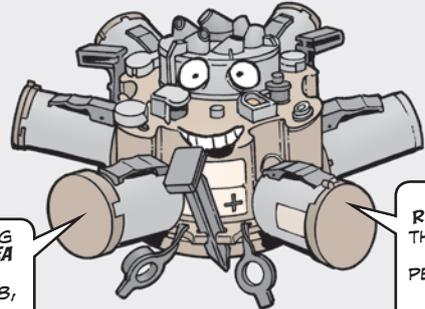

THE ARMY IS FIELDING ME, THE **SPIDER AREA DENIAL SYSTEM**. NSN 1230-01536-0128, LIN M92387.

I'M REPLACING THE ARMY'S ANTI-PERSONNEL LAND MINES.

The Spider consists of a control station and field elements, all of which require batteries. Here are the required non-rechargeable batteries:

Component	Battery	NSN 6135-01-	Batteries Required	Batteries in PKG
RCUT	BA-5360/U	517-4955	2	8
MCU, MCUT, Repeater	LSH-20	463-7077	4 each per MCU, MCUT and Repeater	one
MCU, MCUT	SAFT Ultra-life U10026	566-1034	4 each per MCU and MCUT	one