


LET'S GO!  
LET'S FIRE! I'M  
REALLY JUICED  
THANKS TO PM!

# Juiced-up Javelin

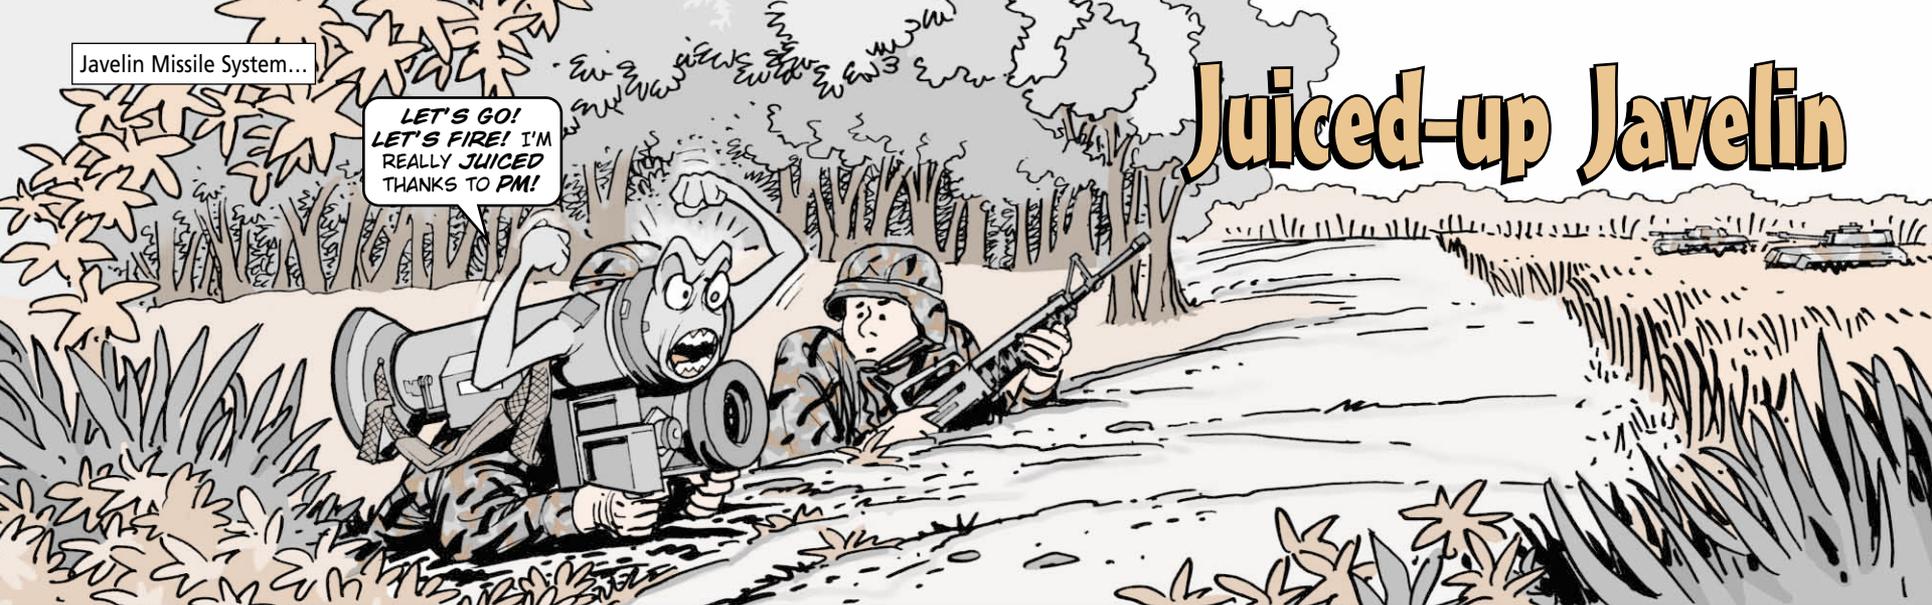

**B**efore you go to the field for firing, check your Javelin command launch unit's **battery compartment** for dirt and bent connector prongs. Either can prevent the launcher from getting enough power.


Wipe away dirt with a clean dry cloth. If the pins are bent, the CLU must be replaced.

Be sure to clean the **day and night vision sight lenses**, too. Use the procedure in Para 3-4 in TM 9-1425-688-12 and cleaning kit, NSN 6850-01-448-9653. The kit is made especially for the Javelin's lenses and won't scratch them. Rinse off the lenses with water before cleaning. That washes away sand and dirt that can get under your cleaning pad and scratch the lenses.


Always check the **CLU round interface connector** for dirt and corrosion that can prevent a good connection to the missile. Wipe away dirt with a clean dry cloth. If necessary, rinse off the connector with water and then clean it out with a cloth. Dry it thoroughly, then wipe away corrosion with isopropyl alcohol and pads from the lens cleaning kit.

Push down the round interface connector's outer sleeve to check for corrosion and dirt. Clean if necessary with pads and alcohol.

Take it easy when you mount the CLU to the round. If you bang it on, you damage both the CLU and missile connections. Put the CLU interface bracket in the round's hooks, then slide the CLU forward until it seats. Push the CLU down until the latch release snaps into place.

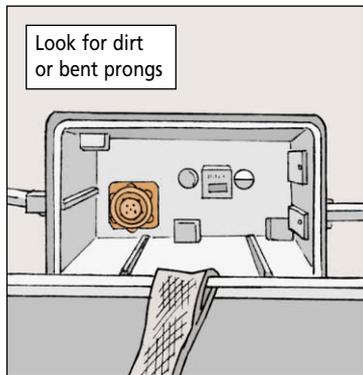


PS 590

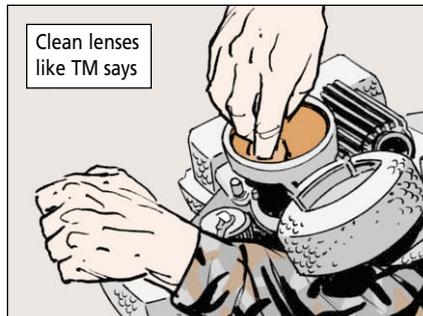


If the lenses are fogged up, the dessicant needs replacing. Tell your squad leader.

42

JAN 02



PS 590

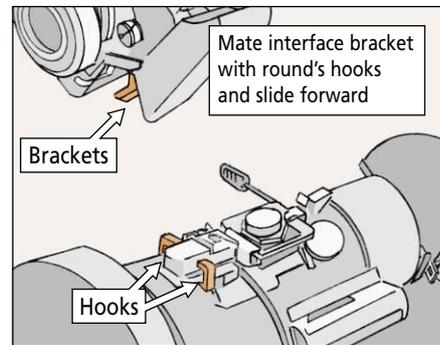

43

JAN 02