

DEUCE...




A Grip on Safety Tips

USING THE EARTHMOVER'S WINCH SAFELY CAN SAVE IT FROM MAJOR REPAIR...


...SO KEEP THESE SAFETY TIPS IN MIND WHENEVER YOU OPERATE THE WINCH.

- Make sure the rear window guard is down during the winching operations. The screen protects the window—and you—from thrown debris or a snapped cable.

Keep rear window guard down when winching

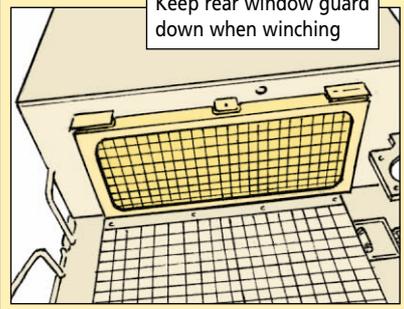

- Use leather gloves, NSN 8415-01-394-0208, when handling the cable. The gloves will protect your hands from burrs and broken wires that are hidden by dirt and grease.

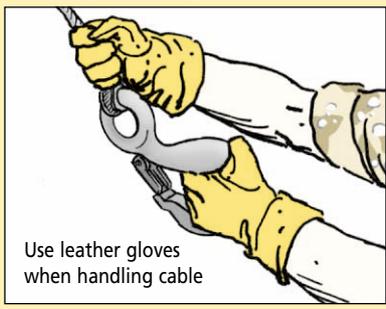


Use leather gloves when handling cable

- Always leave at least five loops of cable on the winch drum when pulling a load. That keeps the pressure off the attaching hardware and on the cable—where it belongs.



Leave at least five loops on winch drum

- Always use the doubling block from the BII compartment when doing a self-recovery or when recovering another DEUCE. The block doubles the DEUCE's pulling force, giving you the muscle you need—44,000 pounds—to do the job.

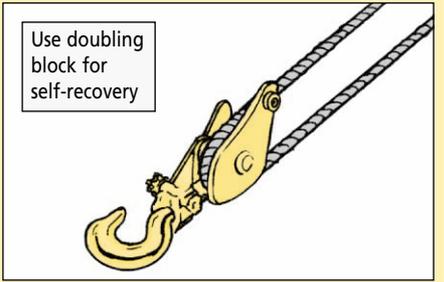

Use doubling block for self-recovery

- Keep the DEUCE and its load in a straight line. Pulling the load at angle puts too much stress on the winch drum and attaching hardware. Also, your sight is blocked by the rollover protective structure. That's an accident waiting to happen.

- The earthmover's winch can handle debris like logs, stumps and fallen trees, and can even recover another DEUCE. To do that, the winching DEUCE must be stationary. But you **can't** tow another DEUCE with the winch cable.