


GIVE MINE BLADE BELTS A LIFT

GREAT JOB
CLEARING
THAT MINE
FIELD TODAY!

THANKS, BUT
HOW ABOUT A
LITTLE HOUSE-
KEEPING?

THERE'S SOME
SAND UNDER
MY
LIFTING BELTS THAT'S
A **REAL GRIND.**

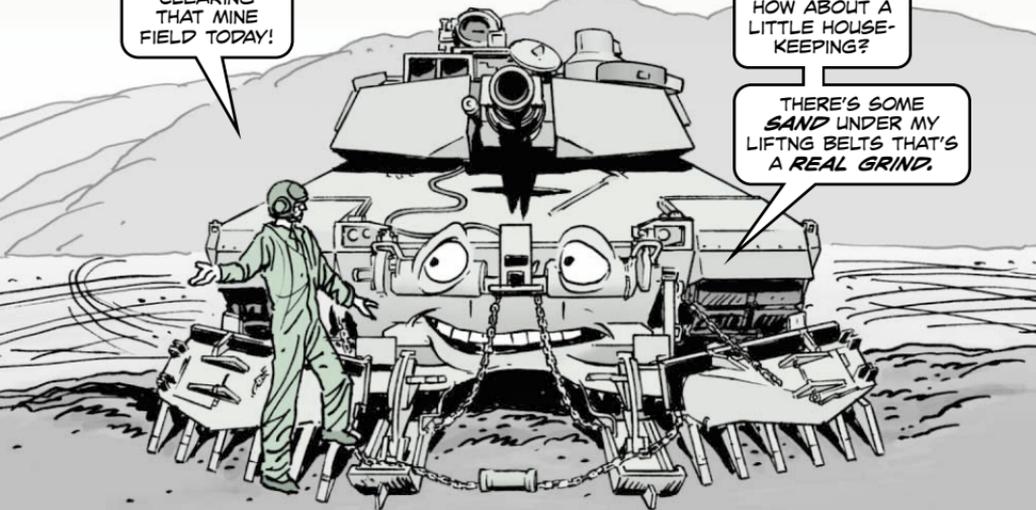


YOU'D THINK IT
WOULD TAKE **A**
LOT TO BRING
DOWN SOMETHING
AS BIG AS YOUR
TANK'S MINE
CLEARING BLADE.

YOU'D BE
WRONG, THOUGH.



A LITTLE SAND
OR A PIECE OF
GRAVEL THAT GETS
CAUGHT UNDER THE
LOWER EDGE OF
THE LIFTING BELT IS
ALL IT TAKES.



THE SAND AND GRAVEL
GRIND AWAY AT
THE LIFTING BELT,
CUTTING
AND TEARING IT.

WITHOUT THE BELTS, THE
BLADE WON'T RAISE OR LOWER.
SO CHECK UNDER THE LIFTING
BELTS AFTER EVERY OPERATION
AND CLEAN OUT ANY ROCKS
AND SAND YOU FIND.

Clean out rocks, sand
and other debris



THEN REPLACE DAMAGED BELTS
USING NSN 4020-01-289-8249.