


Oil Check Done Right

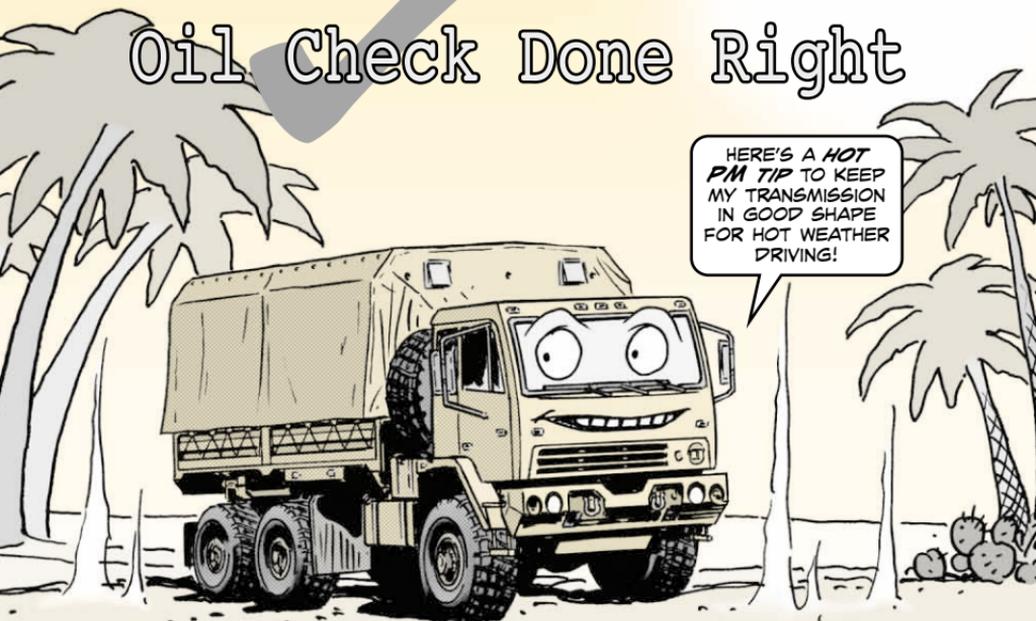

HERE'S A **HOT PM TIP** TO KEEP MY TRANSMISSION IN GOOD SHAPE FOR HOT WEATHER DRIVING!

Operators, stay on the level when it comes to an accurate check on your FMTV's transmission oil level—and use the right oil.

The check must be made after operations, under the following conditions:

- the transmission oil at operating temperature (160°F to 230°F). By the way, this is an **AFTER** check in the -10 TM's PMCS.
- the engine running
- the transmission in neutral
- the truck parked on a level surface.

The oil level should be between the **HOT ADD** and **HOT FULL** lines. Add oil as necessary if the level is below **HOT ADD**. If it's above **HOT FULL**, call in your mechanic.

THE **ONLY OIL** TO USE IN AN FMTV TRANSMISSION IS **OE/HDO-15W40**.

NOTHING ELSE WORKS RIGHT, AND ANYTHING ELSE **VOIDS** THE WARRANTY!

