

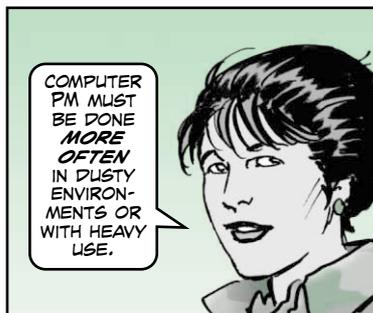



# KEEP MAINTENANCE COMMUNICATIONS OPEN

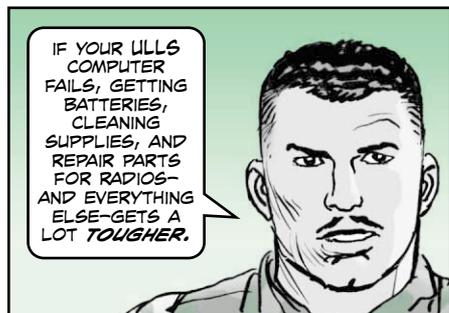

THE ULLS-G USER'S MANUAL DESCRIBES COMPUTER PMCS.

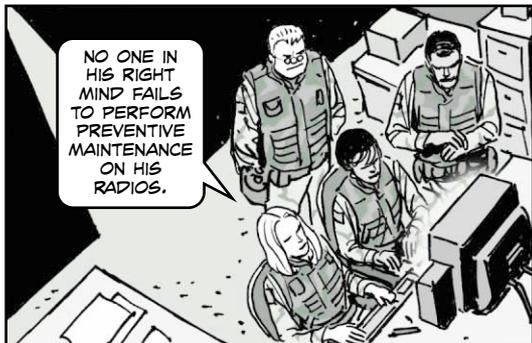

- Before starting PMCS, shut off all power to the computer and peripheral equipment.
- Ensure that dust doesn't clog computer, monitor or printer vents.
- Don't allow paper, books, tent walls, etc., to block vents.
- Ensure cable connections are firm. Lightly tighten with a screwdriver.
- Never use sprays, liquids, or soaked cloths on the case, keyboard, or peripheral equipment.
- Clean cases and keyboard cases with a non-detergent cleaner or damp cloth.
- Turn desktop keyboards upside down. Use a small, soft brush to remove foreign objects.
- Clean laptop keyboards by leaning the laptop on its side and brushing out foreign objects.
- Follow the printer manual for cleaning.
- Use the tape cartridge cleaning kit or foam swab and isopropyl alcohol to clean the tape drive.
- Turn the system on and use a 3.5-in diskette cleaning kit.

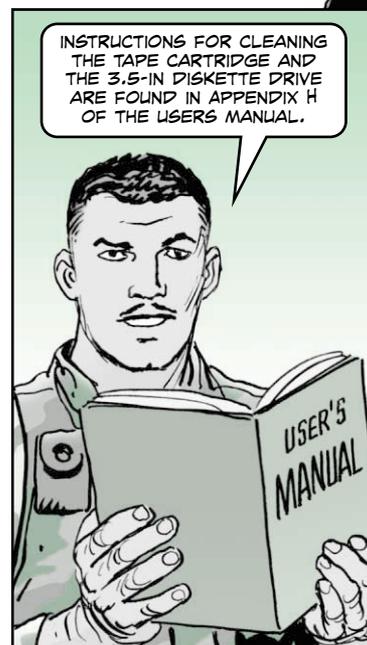

NSN	Description
7530-00-145-0414	Paper, tabulating
4920-01-243-0571	Foam swabs
6505-00-655-8366	Isopropyl alcohol, 1-pint
5130-00-236-2140	Screwdriver, flat tip
Base Supply	3.5-in diskette drive cleaning kit
Base Supply	3.5-in diskettes