


MOUNT 'EM UP!

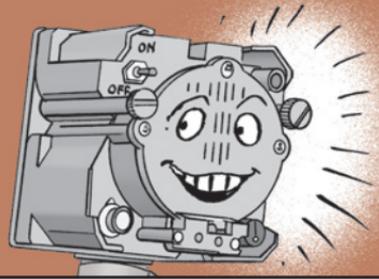

When it comes to mounting the LS-671/VRC SINGGARS loudspeaker, NSN 5965-01-222-1420, the location is the call of the commander.

Two preferred locations on 2 1/2-ton M35-series and 5-ton M809-series trucks are the dashboard and the transmission hump.

You'll find installation instructions in TB 11-5820-890-20-8




Mounting an LS-671 is actually a double-mounting job. First, the mounting plate, NSN 5340-01-391-2740, needs to be mounted to the vehicle and then the loudspeaker needs to be mounted to the mounting plate.

Here are the parts you need to mount the mounting plate to the vehicle:

| Item | Number Needed | NSN |
|-------------|---------------|------------------|
| Bolt | 4 | 5306-00-225-9089 |
| Flat washer | 4 | 5310-00-081-4219 |
| Lock washer | 4 | 5310-00-407-9566 |
| Nut strip | 2 | 5310-01-243-9429 |

You'll need two nut strips

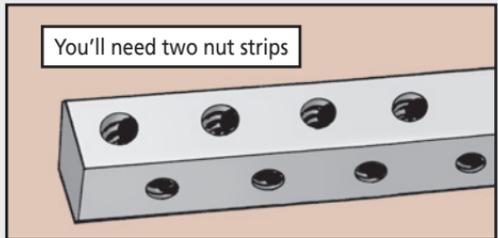

When you order mounting plate, NSN 5340-01-391-2740, you get everything you need to mount the loudspeaker to the plate. The plate, two body screws and two nut strips come in a cotton bag.

If you lose a screw or a nut and don't want to order the entire mounting plate kit, you can order the screw or nut by part number request on a DD Form 1348-6. The part number for the screw is A3018701-4 and for the nut, A3018192-2. There are no NSNs for these parts.

If you have questions about mounting the loudspeaker, contact [@us.army.mil](mailto:us.army.mil) at DSN 992-9181 or email:

Or contact
or email:

[@us.army.mil](mailto:us.army.mil)
at DSN 992-9184
[@us.army.mil](mailto:us.army.mil)