
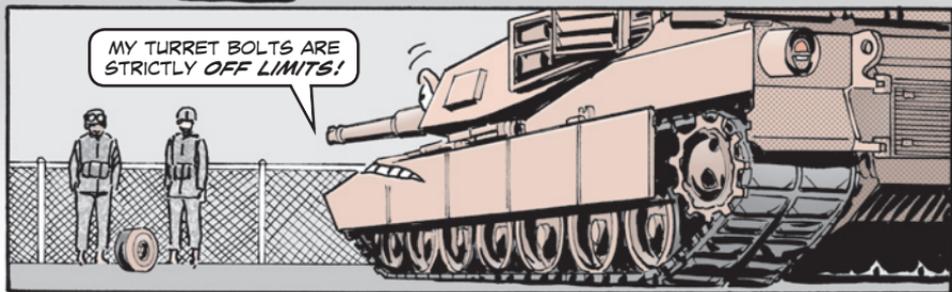


LEAVE TURRET BOLTS ALONE!

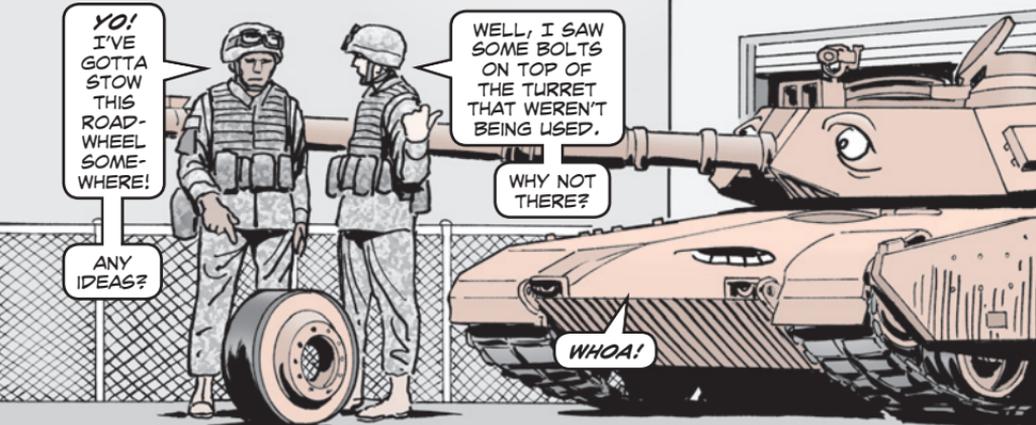

The 11 unused bolts on top of your tank's turret may look like prime locations for mounting flag brackets, roadwheels, lights or other items, crewmen. They're not!

Those bolts, NSN 5305-01-014-5124, protect the threads inside each of the holes where the turret lifting device is attached. Mess up the threads and there's no way to separate the turret from the hull for support-level repairs.

If you've removed any of the bolts or some come up missing, check the holes to make sure they're clean and free of debris. Then, add a little antiseize compound, NSN 8030-00-597-5367, to the threads before reinstalling the bolt. That prevents corrosion and reduces wear and tear on the threads.

And don't forget to add a flat washer, NSN 5310-01-382-9030. It keeps the hole threads from being damaged by the bolt head.

