



PREVENT REMOTE BIOCULAR DISPLAY DAMAGE

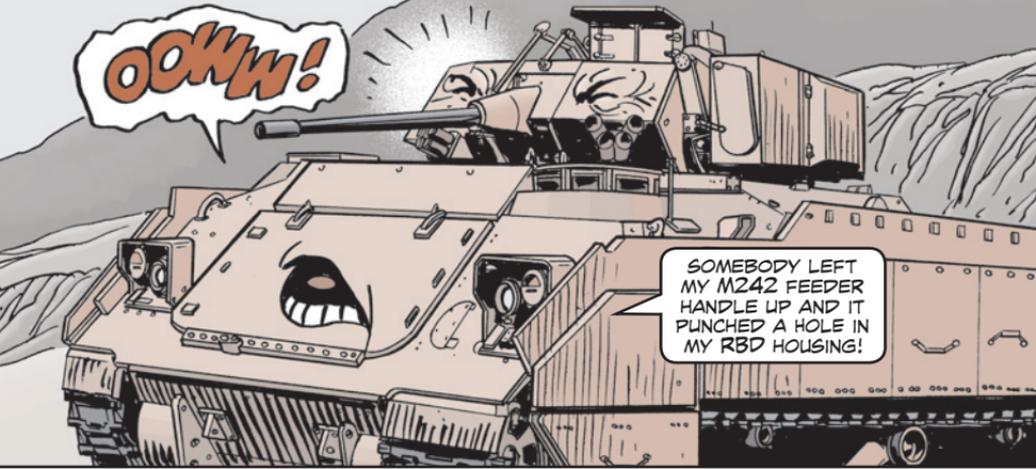

Bradley remote biocular displays (RBD) are taking a beating because crews forget two rules:

Keep the M242 gun's feeder handle lowered in the locked position. If the handle is left up in the unlocked position, when the M242 is depressed in the power mode, its rear end can hit the RBD hard enough to punch a hole in its housing. Any time the M242 is installed, its feeder handle should be locked down.

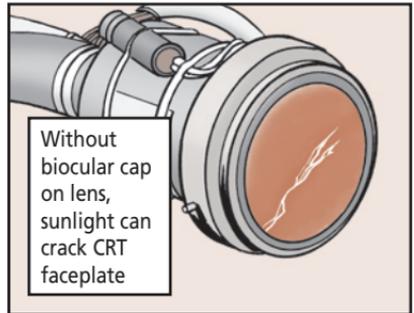

Keep the biocular lens cap on the lens when you're not operating it. Without the cap, sunlight gets in the biocular lens and is magnified and focused on the CRT faceplate. The resulting heat cracks the faceplate.