
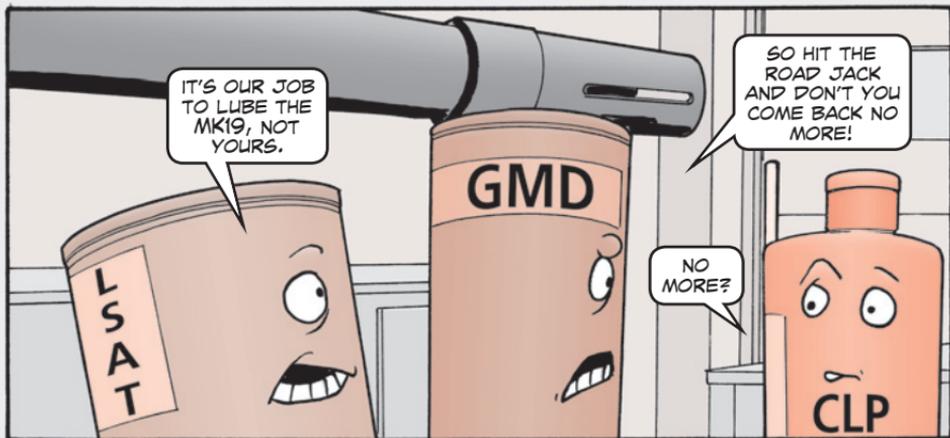


USE THE RIGHT LUBE

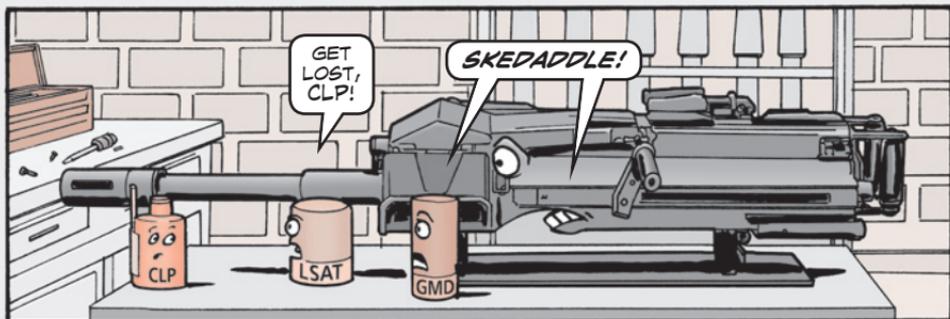

Mechanics, there is one thing you should never do to your MK19 machine gun—lubricate it with cleaner lubricant protectant (CLP).

Using CLP on the MK19 affects the gun's firing, destroys its alloy coating and causes the weapon to corrode. Then it becomes unserviceable.

Always use a light coat of LSAT lube inside the feed tray before and after firing, like it says in TM 9-1010-230-23&P. You can order it in a can, NSN 9150-00-949-0323, or tube, NSN 9150-01-109-7793.

LSAT is the right lube—CLP is the wrong lube. You can also use the GMD lube listed in WP 0010 00-4 of TM 9-1010-230-10. Order 14 ounces with NSN 9150-00-935-4018, 6¹/₂ pounds with NSN 9150-00-223-4004, or 35 pounds with NSN 9150-00-965-2003. Always follow your TM's PMCS to get the job done right.