


# LUBRICATION OPTIONS FOR YOUR GUN



I'M GOING IN FOR A GREASE JOB!


MECHANICS, IN THE DESERT THE 30MM GUN ON YOUR AH-64 NEEDS ALL THE HELP IT CAN GET TO STOP SAND FROM RUINING ITS DAY.

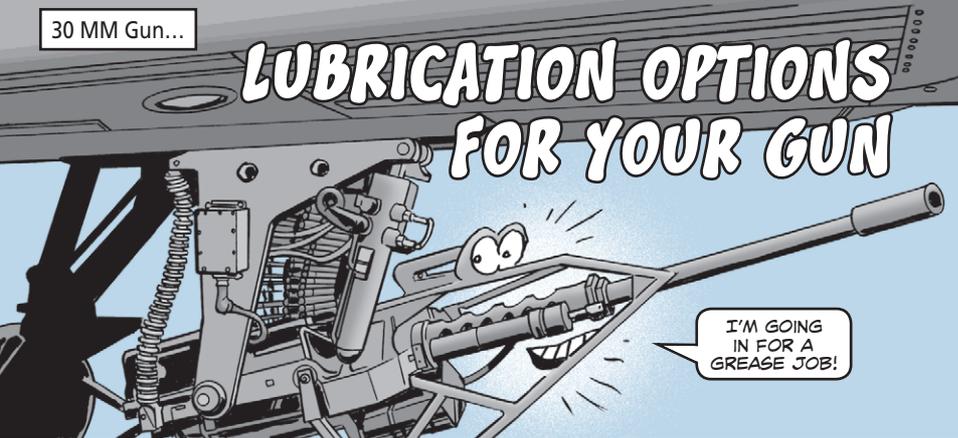

To prevent sand buildup and extend gun use, the TACOM head shed says it's OK to use TW-25B as an alternate lubricant on the flex-chute, the rails of the ammo handling system, and components in the gun's receiver assembly.


First, you should always clean old grease off parts with isopropyl alcohol before applying TW-25B.

When you touch up gun parts like the roller chain, drive gear/bearing, and the bearing surfaces where the rotor mates, apply heavy lubricant. Use a brush, caulk or grease gun, or bearing packer to apply it. When you're finished, white grease should be visible and plentiful.

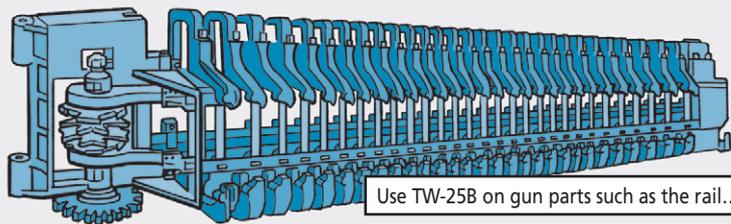


Use TW-25B on gun parts such as the rail...

...and on the roller chain

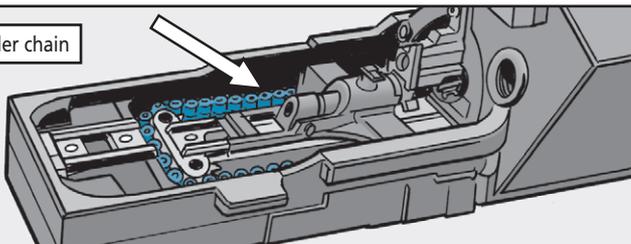

For the forward and aft tracks, bolt and cam area, bolt locking lugs, receiver walls, breech, barrel support, gun support bearings, and ammo rails, use a brush, cloth, or syringe and apply a light to moderate amount of lubricant. When done, white grease should be slightly visible.

Make sure you don't get lubricant on areas of the feeders that contact the ammunition, and limit the amount you apply to areas that the feeders slide on.

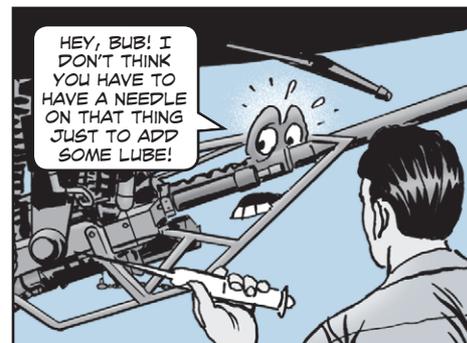

HEY, BUB! I DON'T THINK YOU HAVE TO HAVE A NEEDLE ON THAT THING JUST TO ADD SOME LUBE!

ORDER THE LUBRICANT OIL YOU NEED FOR THE TYPE OF MAINTENANCE BEING DONE AND FOLLOW THE APPLICATION INSTRUCTIONS TO THE TEE.

ORDER FROM THIS LIST.

KEEP IN MIND THAT YOU SHOULD STILL USE MOLY-B LUBRICANT, NSN 9150-00-754-2595, ON PARTS OF THE GUN NOT EXPOSED TO SAND OR WHERE SAND DOES NOT GET IN, LIKE ON THE CONSTANT SPEED DRIVE.



NSN 9150-01	P/N	Size
-448-2266	TW25B-1SY12	0.5 oz syringe
-439-0859	TW25B-1SP11	1.5 oz tube
-439-1873	TW25B-4SP14	4 oz tube
-448-2298	TW25B-CA16EP	16.9 oz EP spray
-439-0858	TW25B-1JSL16	8 oz jar
-535-8338	TW25B-1JSL17	16 oz jar
-535-8687	TW25B-1JSL18	32 oz jar
-439-1864	TW25B-INC17	16 oz caulk
-439-0857	TW25B-6NZ17	16 oz cartridge

IF YOU NEED MORE INFO FROM THE HEAD SHED, CONTACT AT (309) 782-3589, DSN 793-3589 OR EMAIL [us.army.mil](mailto:us.army.mil)

