


# EASY ON THE COVER SCREWS

DAVIS LOOKS LIKE HE'S GONNA BLOW A GASKET!



YEAH! I JUST HOPE I DON'T HAVE TO REMOVE THE GPS DESICCANT SCREW COVERS ON THAT TANK NEXT TIME.

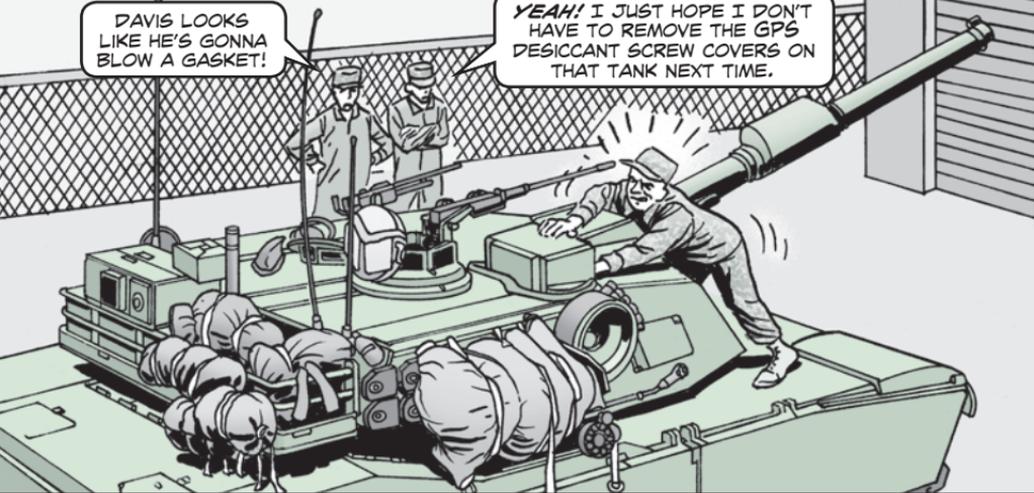

**M**echanics, if your face is red and there's a big vein pulsing in your forehead, you're probably being a little heavy-handed with the desiccant assembly on the doghouse body of the gunner's primary sight (GPS).

When the desiccant is replaced, some of you are being especially rough on the cover screws, NSN 1240-01-267-8162.

If you screw in the covers too tight, the screw slots get chewed up. Your job just got a lot harder the next time the screw covers have to be removed.

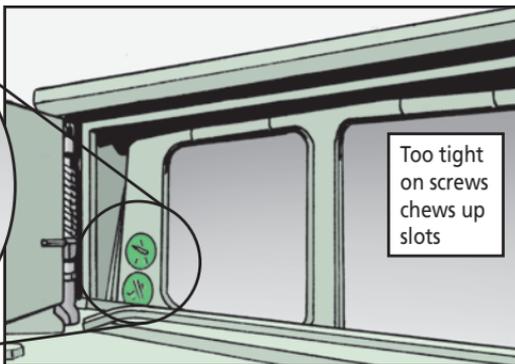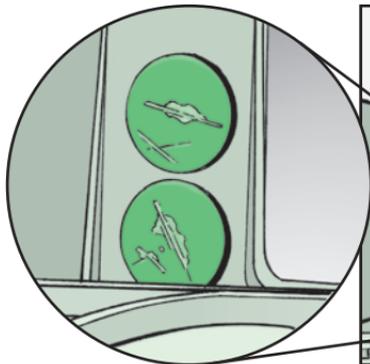

Inside both of the screws is an O-ring, NSN 5331-01-079-2931. It's the O-ring's job to keep the chamber pressurized, not yours.

So tighten the screw cover down, but not so much that you damage the slot. And it's a whole lot better for your blood pressure, too!