

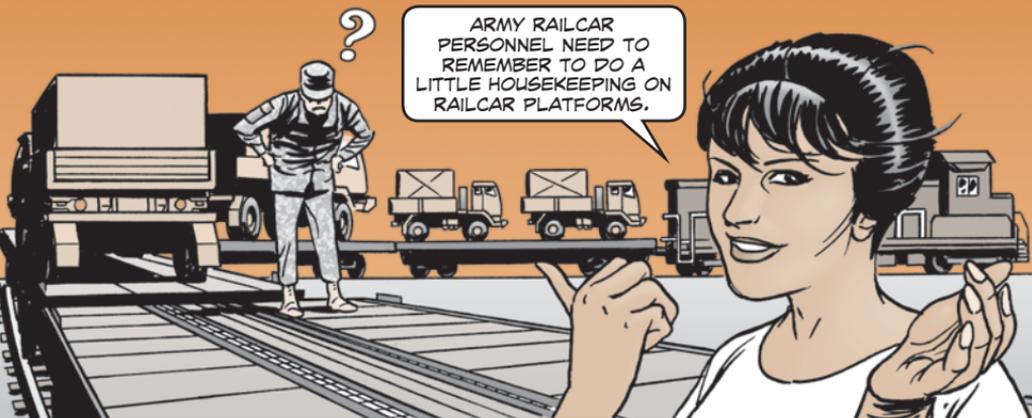


Railcars...

# STOW THE TIEDOWN ASSEMBLIES!

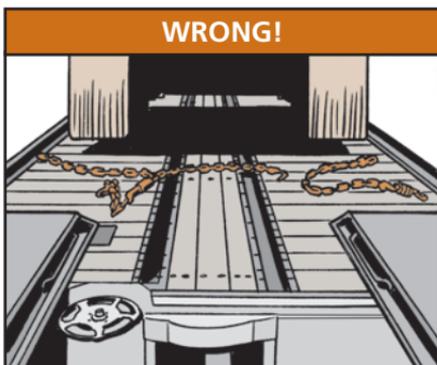

Stow all tiedown chain assemblies in the railcar's platform anchor channels. Or move them to the center of the platform before any vehicles drive on or off the railcar.

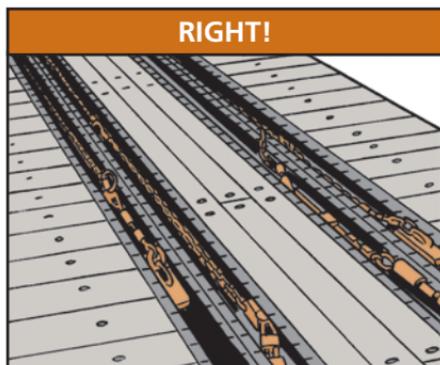

When stowed, tiedown assemblies don't get run over and damaged by heavy equipment. And people won't trip over the assemblies and fall off the railcar's platform.

## 175B Scoop Loader Gasket

NSN 5330-01-088-5984 gets the gasket for the access cover on the scoop loader's flywheel housing. It replaces NSN 5330-00-745-7732, which is shown as Item 4 in Fig 9 of TM 5-3805-257-24P (Oct 93). This gasket is also used for the filter housing on the engine's ventilating system (Item 2 in Fig 27) and the generator assembly (Item 18 in Fig 58) of the same TM.