


Pull the plunger out of the locking detent until it stops (about $\frac{1}{4}$ inch). That unlocks the antenna so it can rotate. Make sure the antenna cable is placed to the outside of the plunger. That prevents it from wrapping around the plunger. With the cable out of the way, you can then safely rotate the antenna to positions for operation or storage.

Put cable OUTSIDE plunger to keep it from wrapping and breaking loose

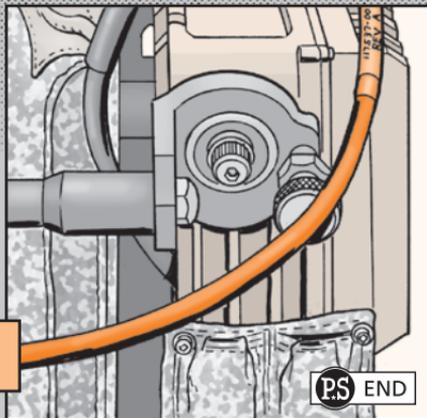

Safety Center Offers Lite Website for Deployed Soldiers

The U.S. Army Combat Readiness/Safety Center can help leaders and Soldiers reduce risk, even when they are deployed to areas with limited Internet connectivity. Their homepage is available in a "lite" version, so it loads only necessary elements to help users with slow Internet connections find what they need. Visit the Safety Center's lite website:

<https://safety.army.mil/lite>

Keep PS in the Loop

Does your unit or organization publish a logistics newsletter, supply or maintenance bulletin, or something similar? If so, please add PS to your distribution list. We're always looking for PM problems and solutions. Email a copy or the subscription info itself to:

half.mast@us.army.mil