



HOW to Reset Your Spider


The Spider training device, NSN 6920-01-570-0648, allows Soldiers to simulate using the munition control unit (MCU) without having to fire Class V munitions or be on a firing range. The only thing the Spider can't do is launch a Class V munition like a Claymore M18A1 through the munition adapter module or fire the miniature grenade launcher.

The munition control unit must be sterilized after a safety or system malfunction. A sterilized MCU can't power up or fire any munitions.




● Make sure the mission control unit trainer (MCUT) power switch is OFF.


● Remove the battery cover.

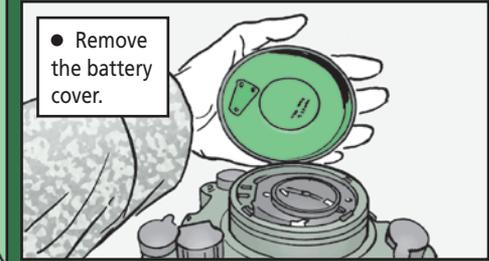

● Remove the battery tray/extended range tripline sensor (ERTS) from the inside of the Spider.
● Reinstall the battery tray/ERTS.




● Do the BIT test to make sure the Spider is working right.



MWO UPGRADES M224

MY GOSH, THE MWO REALLY TRANSFORMED YOU!

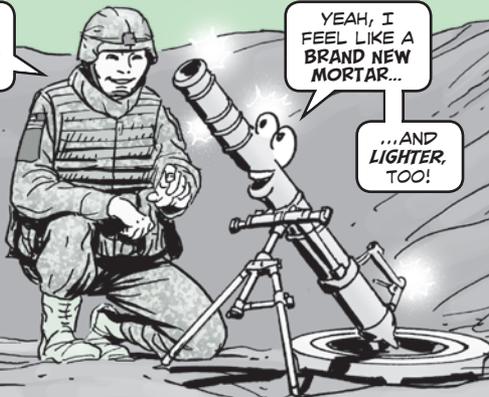

An MWO has just been released that will upgrade the M224 60mm mortar, NSN 1010-01-020-5626, to the M224A1, NSN 1010-01-586-2874.

MWO 9-1010-234-23-1 reduces the M224's weight by 25 percent and makes the mortar easier to maintain and operate. The MWO will be done by teams that are traveling from post to post.

The M67 sight unit and M8 baseplate are the only M224 components that can be used on the M224A1 besides the M224's basic issue items (BI).

Before you fire the M224A1 for the first time, your support will need to borescope and do a pullover inspection of the new 60mm cannon.

For more information about the new M224A1, see TM 9-1010-233-10 or contact Tony Villacis, DSN 786-1224, (586) 282-1224, or email: anthony.k.villacis.civ@mail.mil