

What to Know Before You Tow

When towing the M119A2 howitzer, you need to take special care of the M137A2 panoramic telescope and M187A1 telescope mount. If you don't, damage is sure to follow.

Keep these tips in mind:



WE'RE FINISHED WITH THIS FIRE SESSION. GUESS I'D BETTER GET YOU BACK TO THE MOTOR POOL!

AREN'T THERE A FEW SAFETY STEPS YOU'RE S'POSED TO DO FIRST?!



- Whenever the M137A2 isn't installed, make sure the plastic quick-release protective cover, NSN 5340-01-042-1330, is installed on the M187A1 telescope mount. Without the cover, the quick-release handles could loosen and fall off.

- Never tow your howitzer with the M137A2 installed. Vibration could damage both the telescope and the M187A1 mount where the two are connected.

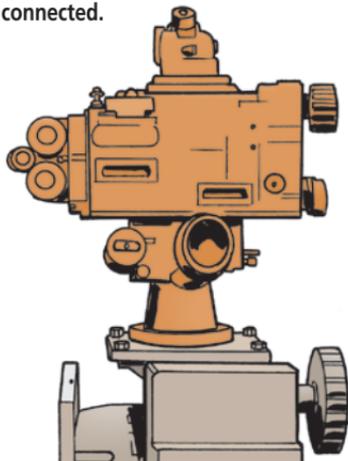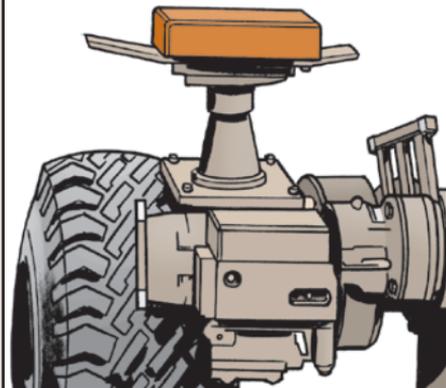

- Make sure the canvas fire control telescope mount cover, NSN 1240-00-819-4524, is installed prior to towing. Without the cover, flying debris can damage the M187A1 mount.