

I'VE GOT SOME TIPS THAT SHOULD SUIT YOU JUST FINE WHEN YOU'RE WEARING ME!



# JSLIST Tips to Suit You

Joint service lightweight integrated suit technology (JSLIST) can do a terrific job of protecting you, but only if you put it on correctly. If you leave gaps in the suit or miss a strap, you've missed out on vital protection. Here are some JSLIST tips that will suit you right:

**Get help.** An extra set of eyes will ensure you get all JSLIST openings closed and all the straps secured. Put on your JSLIST with the help of a buddy. You can check his suit and he can check yours.

HEY, LET'S HELP EACH OTHER GET OUR JSLIST ON RIGHT.

YEAH, I'LL CHECK YOUR SUIT IF YOU CHECK MINE!




**Work out the kinks.** If you can't secure the hook-and-loop fasteners for the hood, the drawstring is probably too tight. Have your buddy work out the kinks in the drawstring to get as much slack in the drawstring as possible.

Work out kinks in drawstring



It's better to secure the bottom of the hood fastener first and then work your way up. That way you're less likely to leave a gap. Look up while you're securing the hood fastener. That also helps prevent gaps.

Start with bottom of fastener

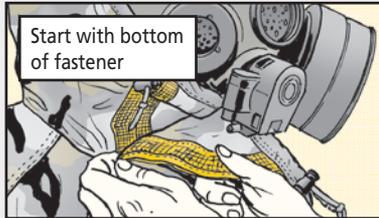


**Get a good seal with the mask.** Make sure the JSLIST hood seats around the top of the mask's second skin just above the eye lenses and just below the outlet valve. Once the hood is properly positioned, then tighten the hood drawstring.

Hood should seat just above eye lenses and just below outlet valve



**Lock up barrel lock.** If the barrel lock comes loose, the hood won't stay tight. Make sure its button points out. If it points in, the mask can bump it and cause it to unlock. Once the barrel lock is locked, tie a bow below it (it's easier if your buddy does it). That way if the drawstrings are jerked, the barrel lock itself won't be jerked and broken.

Barrel lock button should point out

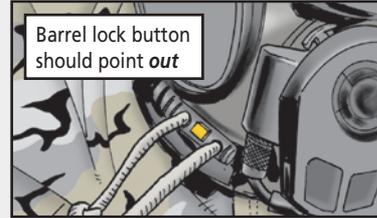


Tie a bow below barrel lock



**Secure ALL the straps.** The pants may be more comfortable if you don't hook up the two hook-and-loop waist straps, but that leaves the straps dangling where they can catch on something and break the JSLIST's seal.

Connect both hook-and-loop straps on waist

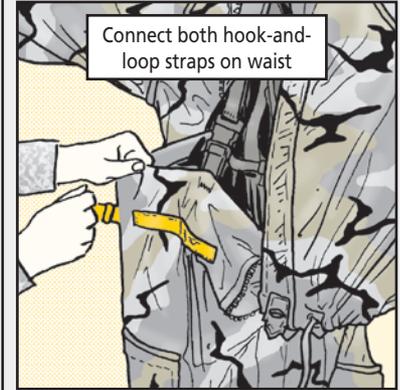

If the pants suspenders are too long even after you adjust them, cross them to take up the slack.

Cross suspenders if they're too long



When you take off JSLIST, make sure to first unhook the suspenders before you take off the blouse. Otherwise, you can damage the blouse.