



A Little Lube Saves Your Noggin'

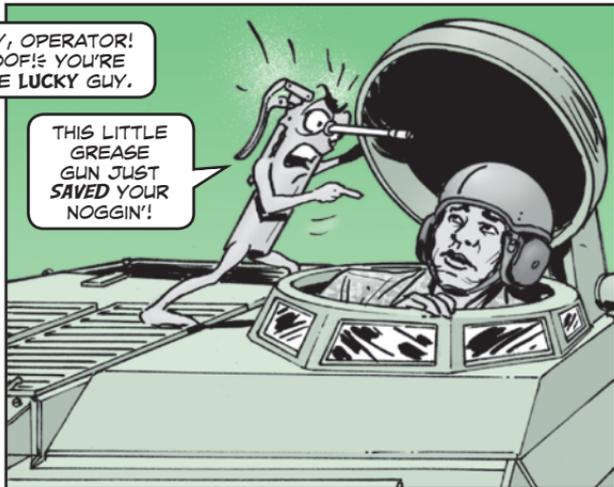

Operators, keep this PM tip in mind 'cause it's a real noggin' saver!

Without lube, condensation gets into the hatch hinge assembly's internal spring, causing it to rust. The spring continues to weaken until it finally breaks. Then the hatch cover can fall on your head!

There are two grease fittings that lube the assembly's internal spring. They're shown in Note 16 of WP 0076-25 in TM 5-2350-262-10 (Jun 12). Give each fitting four or five pumps of GMD quarterly.

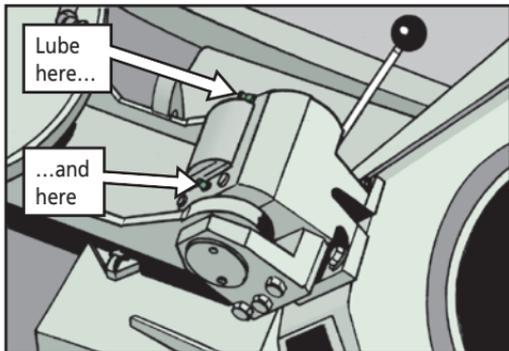

UNFORTUNATELY, GMD IS MISSING FROM THE EXPENDABLE AND DURABLE ITEMS LIST IN WP 0082 OF TM 5-2350-262-10.



UNTIL IT CAN BE ADDED, ORDER FROM THIS LIST...

Size	NSN 9150-
14-oz cartridge	00-935-4018
1.75-lb can	00-754-2595
6.5-lb can	00-223-4004
35-lb can	00-965-2003