


# SWITCH GREASE TO STOP O-RING SWELLING



CREWMEN, O-RINGS FROM THE BORE EVACUATOR ON THE PALADIN'S GUN TUBE SOMETIMES **SWELL** SO MUCH AFTER BEING REMOVED FOR MAINTENANCE THAT THEY CAN'T BE REINSTALLED.

THAT'LL PUT A STOP TO **ANY** FIRING MISSION IN A HURRY!

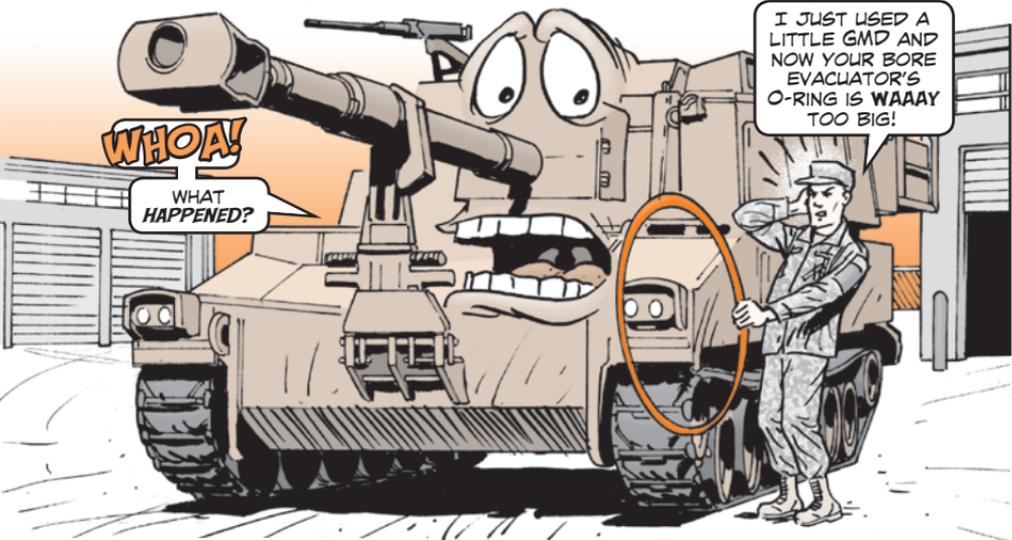

TESTING HAS SHOWN THE SWELLING IS CAUSED BY GMD, SO STOP USING THAT GREASE **NOW**.

INSTEAD, USE GENERAL PURPOSE GREASE (GGP) OR GAA WHEN LUBING O-RINGS.

Get a 14-oz tube of GAA with NSN 9150-01-197-7693. A 1<sup>3</sup>/<sub>4</sub>-lb can comes with NSN 9150-01-197-7690 and NSN 9150-01-197-7689 gets you a 6<sup>1</sup>/<sub>2</sub>-lb can.

Get a 1<sup>3</sup>/<sub>4</sub>-lb can of GGP with NSN 9150-00-985-7316 and a 35-lb can with NSN 9150-00-823-8047.