
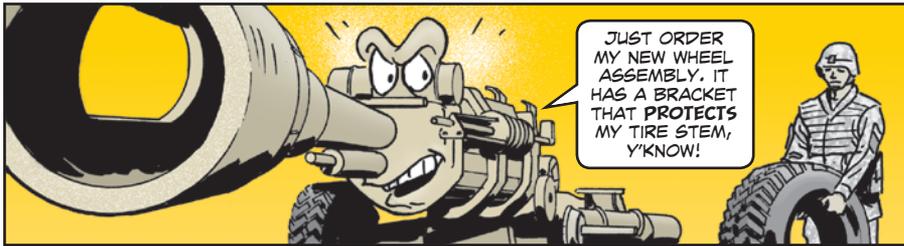


STEM THE TIDE OF BROKEN TIRE STEMS!

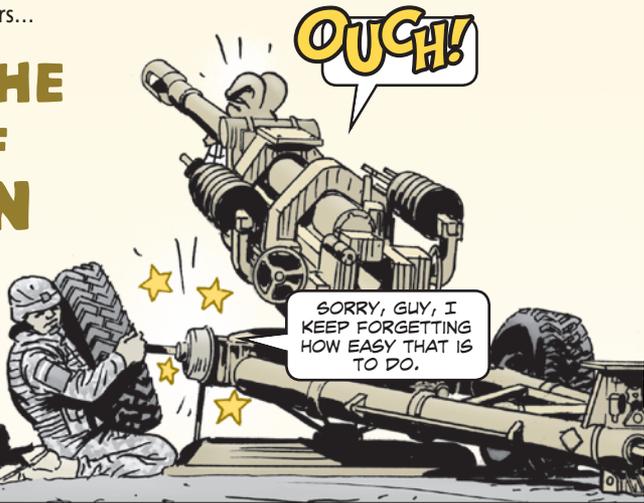


Crewmen, at one time or another you've probably broken the tire stem off the right-side (knockoff) wheel on your M119-series towed howitzer. It's easy to do when removing the wheel for emplacement.

It's frustrating because now you have to take the time to replace the tire. Even worse, your howitzer is NMC until that's done.

But now there's a new tire assembly, NSN 2530-01-626-2559, designed to prevent broken tire stems and keep your howitzer in the game.

The new assembly has a bracket and counterweight welded to the wheel rim.

This acts as a guard to protect the valve stem when removing or remounting the wheel.

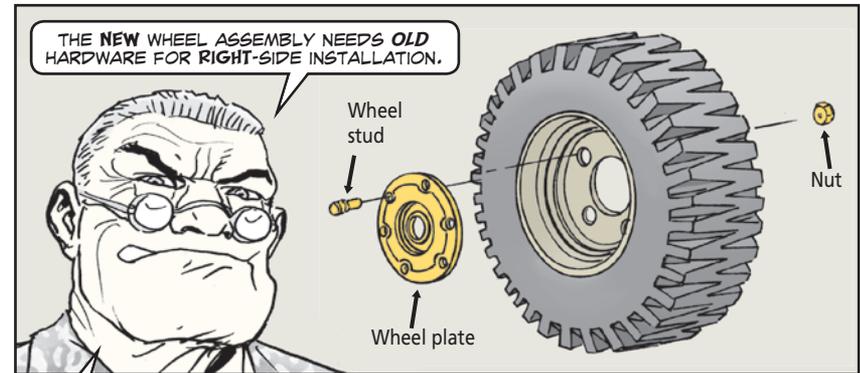

IT COMES READY TO INSTALL AS A LEFT-SIDE ASSEMBLY. BUT TO INSTALL IT AS A RIGHT-SIDE ASSEMBLY, YOU'LL NEED...

THE WHEEL PLATE, NSN 1015-01-341-8687;
SIX WHEEL STUDS, NSN 1015-01-343-1901;
AND SIX NUTS, NSN 5310-01-342-3687, FROM THE OLD RIGHT-SIDE ASSEMBLY.

