


M149A2
Water
Trailer...

LEMME
AT THAT
**MANHOLE
COVER SEAL!**
IT **WON'T**
BE LEAKIN'
WHEN I GET
FINISHED
WITH IT.

LEAK TWEAK SEALS THE DEAL!

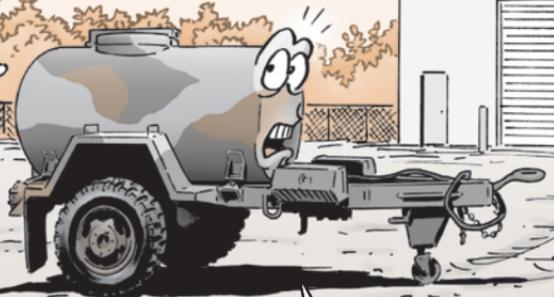

WAIT! THERE'S A RIGHT AND A
WRONG WAY TO DO IT AND THAT
SURE *AINT* THE RIGHT WAY!

Mechanics, got a leak around the manhole cover of an M149A2 water trailer? Then it needs your attention right away.

Before you can install the new, improved seal, NSN 5330-01-317-9640, you'll first have to remove the old seal. Here are the steps to take:

1. Remove the manhole cover.
2. Scrape off the old seal and toss it.
3. Sand the outer 1 1/2 inches of the underside of the cover with emery paper.
4. Wipe with a damp cloth.
5. Let the cleaned area dry completely.

Now you're ready to install the new seal:

1. Apply adhesive, NSN 8040-00-118-2695, to the mating surface of the new seal and manhole cover.
2. Slip the seal onto the cover.
3. Now lay the seal side of the cover on a smooth, flat surface, such as a work bench or table top. Let the sealant cure for 24 hours.
4. Reinstall the manhole cover on the tank.

