



Getting Wired

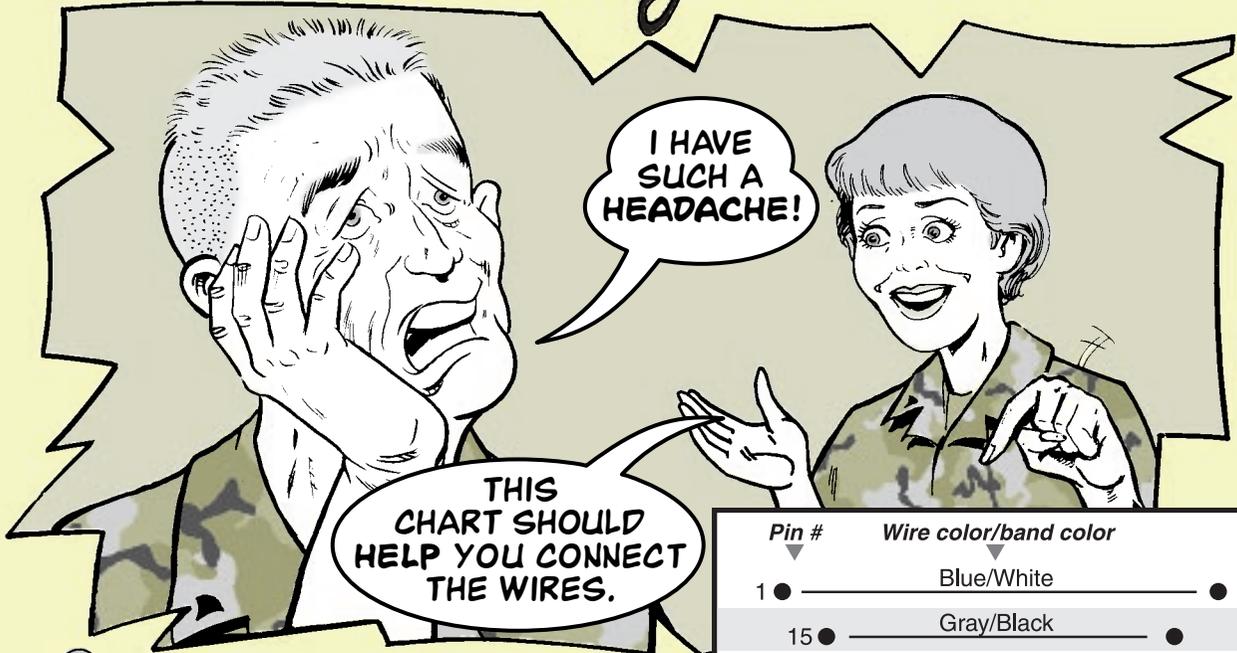

Rewiring a 26-pair cable connector can be a real repair headache. But there are a couple of things you can do to ease the pain.

First, use this chart to help you when you test the wires and also when you connect them. Include the pin number, the color of the wire and the color of the band on the wire.

Second, make the wire connections from the bottom of the hock (closest to the cable) to the top, cutting the wires to fit as you go. Too much wire slack or not enough leads to broken wires.

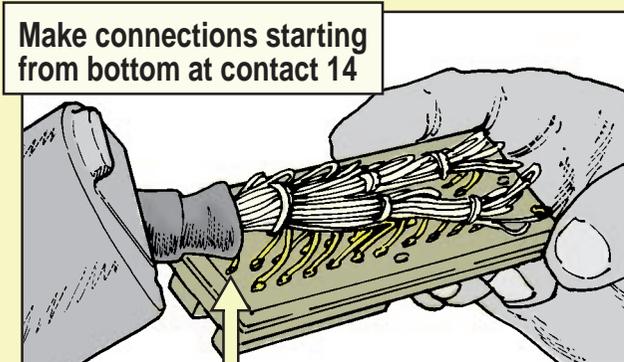

Pin #	Wire color/band color
1 ●	Blue/White ●
15 ●	Gray/Black ●
3 ●	Green/White ●
17 ●	Orange/Yellow ●
5 ●	Gray/White ●
19 ●	Brown/Yellow ●
7 ●	Orange/Red ●
21 ●	Blue/Violet ●
9 ●	Brown/Red ●
23 ●	Green/Violet ●
11 ●	Blue/Black ●
25 ●	Gray/Violet ●
13 ●	Green/Black ●
26 ●	Red/White ●
12 ●	Orange/Black ●
24 ●	Brown/Violet ●
10 ●	Gray/Red ●
22 ●	Orange/Violet ●
8 ●	Green/Red ●
20 ●	Gray/Yellow ●
6 ●	Blue/Red ●
18 ●	Green/Yellow ●
4 ●	Brown/White ●
16 ●	Blue/Yellow ●
2 ●	Orange/White ●
14 ●	Brown/Black ●