

TRY THESE TIRE CHAIN TIDBITS

WHEN IT'S SUPER COLD OUTSIDE, IT'S HARDER TO FUNCTION.

THAT'S WHEN A LITTLE EXTRA CAN MAKE ALL THE DIFFERENCE.



FOR PEOPLE, THAT MEANS BUNDLING UP IN LAYERS OF CLOTHING.

THERE! **SEVEN LAYERS** OUGHTA DO IT!



FOR YOUR VEHICLES, THAT COULD MEAN USING TIRE CHAINS WHILE TRAVELING IN SEVERE SNOW AND ICY CONDITIONS.


AFTER I PUT THESE CHAINS ON YOUR TIRES, WE'LL TAKE A RIDE.

ARE YOU **SURE** YOU KNOW WHAT YOU'RE DOING?




TIRE CHAINS **IMPROVE** TRACTION ON ICE AND PACKED SNOW...


...**BUT ONLY** IF THEY ARE INSTALLED PROPERLY AND CLEANED REGULARLY.

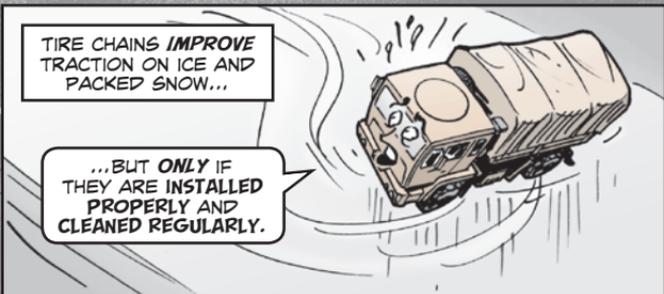

CHAINS THAT ARE PACKED WITH ICE LOSE THEIR EFFECTIVENESS.


I COULDA TOLD YOU **THAT!**

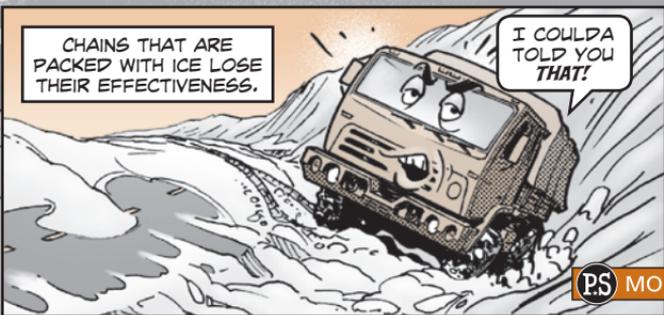

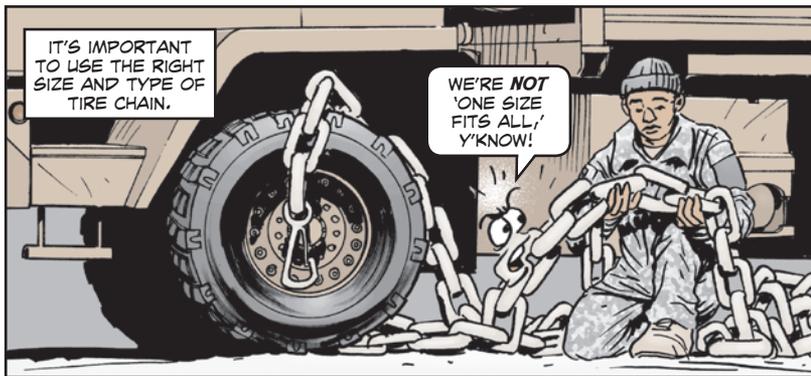

IT'S IMPORTANT TO USE THE RIGHT SIZE AND TYPE OF TIRE CHAIN.

WE'RE NOT 'ONE SIZE FITS ALL,' Y'KNOW!

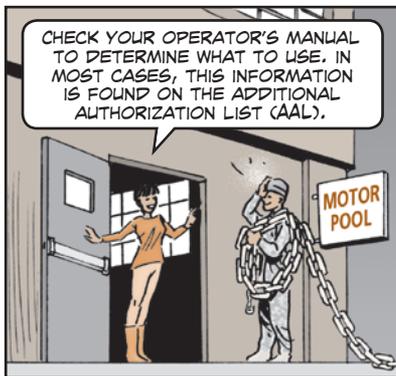

CHECK YOUR OPERATOR'S MANUAL TO DETERMINE WHAT TO USE. IN MOST CASES, THIS INFORMATION IS FOUND ON THE ADDITIONAL AUTHORIZATION LIST (AAL).



YOU CAN ALSO EYEBALL TC 21-305-20; MANUAL FOR THE WHEELED VEHICLE OPERATOR, FOR AN EXPLANATION ON HOW TO INSTALL TIRE CHAINS.

USE THIS TABLE TO ORDER THE TIRE CHAIN ASSEMBLY NEEDED FOR YOUR WHEELED VEHICLE...


Wheeled vehicle	Tire size	Chain assembly. NSN 2540-
FMTV	395/85R20	01-483-2930 or 01-492-2989
HEMTT/HET/PLS	16x20	01-152-7813
HMMWV	37x12.5x16.5 (radial)	01-214-1264
M915A2/A3/A4	11R22.5	01-453-0497
M916A1/A2/A3 and M917A1/A2/E1/E2	315/80R22.5	01-396-1914
M939	11x20	00-933-9022
M939A1/A2	14X20	00-933-9033

NOTE THAT FOR THE M35A3, TIRE SIZE 14.5R20XL, THERE IS NO NSN ASSIGNED FOR THE TIRE CHAIN.

YOU CAN ORDER THOSE CHAINS ON A DD FORM 1348-6 USING PN 8055V AND CAGE 4N506.

Tire size	Chain assembly (pair) NSN 2540-	Cross chain NSN 2540-	Swivel hooks NSN
7.50x16	00-528-7360	00-933-6960	4030-00-937-0405
9.00x20	00-933-9024	00-933-6916	2540-00-937-0404
9.50x16.50	00-057-0204	00-933-6916	2540-00-937-0404
10.00x15	01-185-8306	00-933-6916	2540-00-937-0404
10.00x20	00-933-9034	00-933-6916	2540-00-937-0404
10.00x20 (dual tires)	00-933-9034	00-933-6916	2540-00-937-0404
11.00x18	00-933-6933	00-933-6915	2540-00-937-0404
11.00x20	00-933-9022	00-933-6915	2540-00-937-0404
11.00x24	00-933-6935	00-933-6915	2540-00-937-0404
12.00x20	00-933-6922	00-933-6915	2540-00-937-0404
14.00x20	00-933-9033	00-933-6992	2540-00-937-0404
14.00x24	00-933-9023	00-933-6992	2540-00-937-0404
16.00x20	01-152-7813	Not Available	Not Available

FOR MORE INFORMATION ON TIRE CHAINS, CONTACT THE DLA CUSTOMER INTERACTION CENTER AT DSN 661-7766/(877) 353-2255 OR EMAIL: dlacustomercenter@dlia.mil

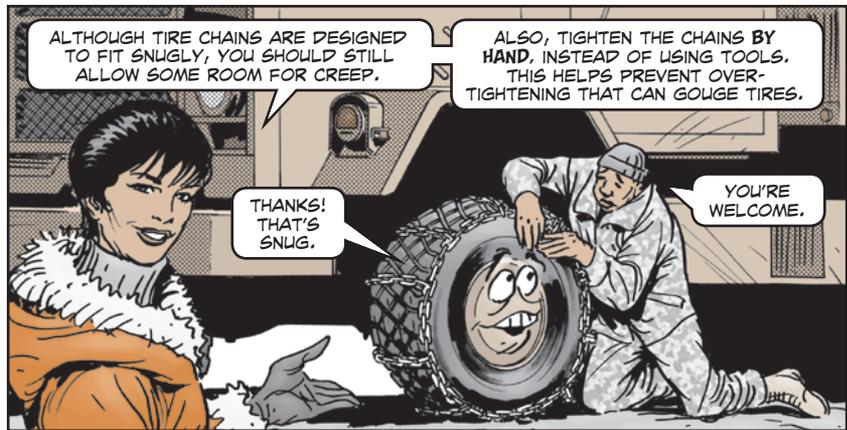

ALTHOUGH TIRE CHAINS ARE DESIGNED TO FIT SNUGLY, YOU SHOULD STILL ALLOW SOME ROOM FOR CREEP.

ALSO, TIGHTEN THE CHAINS BY HAND, INSTEAD OF USING TOOLS. THIS HELPS PREVENT OVERTIGHTENING THAT CAN GOUGE TIRES.

THANKS! THAT'S SNUG.

YOU'RE WELCOME.



IF THE CHAINS DON'T FIT PROPERLY AFTER YOU TIGHTEN BY HAND, USE TIRE STRAPS TO SNUG DOWN THE TIRE CHAINS.

HERE'S SOME GUIDANCE FOR SELECTING STRAPS...

Length (in inches)	Stretch (in inches)	NSN 5340-
15	20-30	01-029-9084
21	26-42	01-231-6015
31	36-42	01-029-9085